

# DT35 SERIES DITCHERS

HP REQUIRED  
30-60 HP


HITCH  
Cat. 1 & 2



DIRTWORKING

## Quickly create channels for small irrigation ditches.

The DT35 Ditcher features a standard 1" ripper shank, adjustable impeller head, and reversible/replaceable cutting edges. The DT35 quickly creates channels for small irrigation ditches and for efficiently diverting water from unwanted areas.

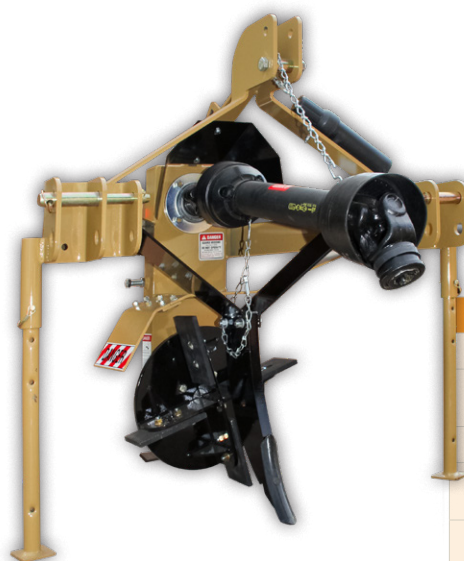

|                                    | DT35   |
|------------------------------------|--|
| <b>Horsepower</b>                  | 30-60 HP   |
| <b>Hitch</b>                       | Cat. 1 & 2, Quick-Hitch Adaptable                  |
| <b>Machine Weight - lb (kg)</b>    | 390 (177)  |
| <b>Impeller</b>                    | 4 Adjustable Blades with Replaceable Cutting Edges |
| <b>Impeller Settings</b>           | 16" Narrow Trench;<br>18" Wider & Deeper Trench    |
| <b>Driveline</b>                   | Cat. 4 with Shearbolt                              |
| <b>Material Control Deflector</b>  | Manual   |
| <b>1" Ripper Shank</b>             | Standard   |
| <b>Drive Chain</b>                 | #80 Roller Chain Fully Enclosed in Oil Bath        |
| <b>Chain Tightener</b>             | Easily Accessible                                  |
| <b>Storage Stands</b>              | Standard   |
| <b>Depth Controlling Skid Shoe</b> | Replaceable, 3/8" Thick                            |
| <b>Colors</b>                      |  |



Due to the highly abrasive environment, the impeller blades and skid shoes are both adjustable and replaceable.

\*See dealer for complete warranty information.

