

# RC47/56/66 10' OFFSET ROTARY CUTTERS

HP REQUIRED  
50-250 HP

CUTTING CAPACITY  
4", 4-1/2"

HITCH  
Pull-Type




	RC4710	RC5610-2	RC6610-2
<b>Horsepower</b>	50-250 HP	50-250 HP	
<b>Hitch</b>	Pull-Type; Standard Clevis, LP Performance Self-Leveling, Pintle, Ball, Bar-Tite		
<b>Working Width (cm)</b>	10' 6" (320)	10' 6" (320)	
<b>Overall Width</b>	11'8"	11'7"	
<b>Min. Transport Width</b>	8'10"	7' 6-1/2"	
<b>Overall Length</b>	15'6"	16' 5"	
<b>Machine Weight - lb (kg)</b>	5,160 (2341)	5,277 (2394)	5,292 (2400)
<b>Cutting Height</b>	1-1/2" - 16"	2" - 14"	
<b>Cutting Capacity</b>	4" Diameter	4" Diameter	4-1/2" Diameter
<b>Tongue Weight - lb</b>	1,948	2,060	
<b>Deck Thickness</b>	10 Gauge	7 Gauge Bottom, 10 Gauge Top	
<b>Max. Turning Angle</b>	80° with CV		
<b>Deck Height</b>	12"		
<b>Suspension</b>	Independent Wheel Arm Springs	Independent Wheel Arm Springs	
<b>Deck Rings</b>	Optional		
<b>Side Panel Thickness</b>	1/4"	1/4" Replaceable	
<b>Skid Shoes</b>	Wing and Center, Replaceable, Beveled	Wing and Center, Replaceable, Beveled	
<b>Chain Guards Front &amp; Rear</b>	Double Optional	Double Optional	
<b>Blades</b>	1/2" x 4" Uplift		
<b>Blade Bolt</b>	Keyed w/Hardened Flatwasher & Lock Nut		
<b>Blade Tip Speed (Feet per minute)</b>	<b>540 Center</b>	16,300 fpm	16,300 fpm
	<b>Wings</b>	16,300 fpm	16,300 fpm
	<b>1000 Center</b>	16,300 fpm	16,300 fpm
	<b>Wings</b>	16,000 fpm	16,000 fpm
<b>Blade Overlap</b>	6"		
<b>Dishpan</b>	Forged Diamond Blade Bar, Optional 3/16" Round Dishpan	3/16" Round, Dish Shaped with 1" x 5" Blade Bar	
<b>Hydraulics</b>	<b>Wings</b>	2-1/2" x 12"	3" x 8"
	<b>Center</b>	3" x 8"	3-1/2" x 8"
<b>Gearbox Rating<sup>^</sup></b>	540 RPM or 1000 RPM: 250 HP Divider		
	210 HP Center & Wing	210 HP Center & Wing	225 HP Center & Wing
<b>Gearbox Output Shaft</b>	2-3/8"		2-3/8"
<b>Gearbox Input Shaft</b>	1-3/4" 20 Spline		1-3/4" 20 Spline
<b>Input Driveline</b>	Cat. 6 CV		Cat. 6 CV
<b>Connecting Drivelines</b>	Cat. 4 or 5 Slip-Clutch	Cat. 4 or 5 Slip-Clutch	Cat. 5 Slip-Clutch
<b>Tires</b>	21" or 26" Laminated 29" Used Aircraft 24" Foam-Filled	21" Laminated 29" Used Aircraft 25.5" Foam-Filled	
<b>Transport Lights</b>	Standard		
<b>Colors</b>			

CUTTERS

## Making roadside cutting safe and efficient.

The RC4710, RC5610-2, and RC6610-2 Rotary Cutters are single wing mowers that are ideal for roadside mowing. The left-hand wing is replaced with a weight box and allows the operator to travel next to the road's shoulder, remaining on more level ground. All the features you love from our 15-foot cutters are there too, in a 10-foot single wing mode!!

- Left hand weight box
- Optional hitch configurations
- Optional deck rings
- Replaceable 1/4" sideskirt with replaceable skid shoe (RC56/66 only)
- Smooth top design
- Heavy-duty dishpans (RC56/66 only)

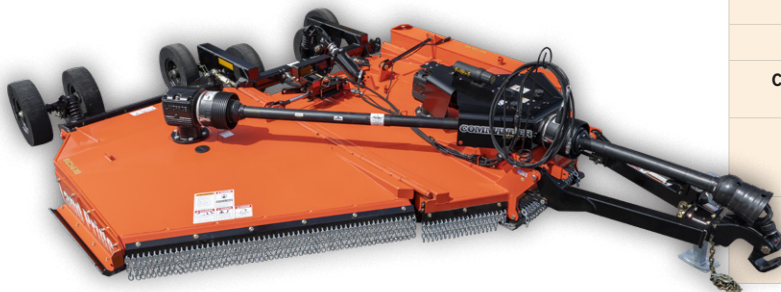

RC5610-2

\*See dealer for complete warranty information. ^Based on field performance.