


# SR/SRF27 POWERED RAKES

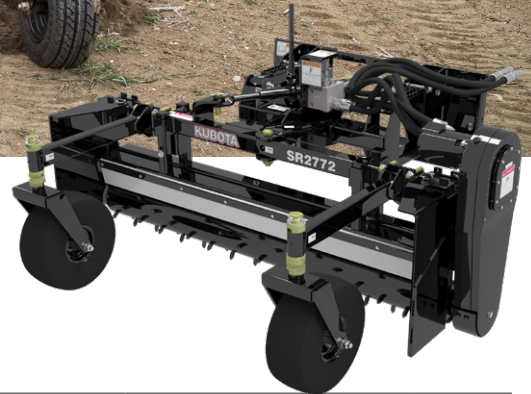

**AVAILABLE FOR: SSV65 / SSV75 / SVL65-2 / SVL75-2 / SVL95-2s**

- SR: Float or rigid option
- SRF: Fixed hitch - no angling
- Manual or hydraulic angle
- Cast chain housing
- Larger U-bolts on gauge wheel
- Carbide tipped studs

Landscapers and housing contractors can prep and level ground for seeding, remove unwanted material and debris, and rejuvenate gravel driveways and lots. Powered rakes make excellent rental tools.



Angle/float hitch: When operated in float, it allows the gauge wheels and rake to float with the contour of the ground.

Carbide tipped studs and bi-directional roller with variable speed enables more complete finish and control.



	SR2772	SR2790	SRF2772	SR2790
Hydraulic Flow Requirements (lpm)	12-24 gpm (45.4-90.8)	15-24 gpm (56.8-90.8)	12-24 gpm (45.4-90.8)	15-24 gpm (56.8-90.8)
Hydraulic Pressure Range (MPa)	2250 to 3500 psi (15.51-24.13 MPa)			
Non-Angled Working Width (m)	72" (1.83)	90" (2.29)	72" (1.83)	90" (2.29)
Weight (kg)	1101 (499)	1255 (569)	1098 (498)	1256 (570)
Direction of Travel	Bi-directional			
Material Control Blade (cm)	2 Each- 1/2" x 5" (1.3x12.7) urethane			
Spike Roller (cm)	9-3/8" (23.8) Diameter with 3/4" x 1-1/2" (1.9x3.8) carbide tipped studs			
Roller Speed	Variable from 200-350 rpm			
Roller Side Bearings	Roller bearings			
Drive Chain	#50 Double continuous roller chain, high tensile, enclosed in oil bath			
Side Plates	Standard, removeable with storage rack			
Skid Shoes	Replaceable			
OPTIONS				
Hitch	Fixed Hitch	N/A	Standard	
	Angle Hitch	Available	N/A	
	Angle/Float Hitch	Available	N/A	
Angle Actuator for Angling 20° Left or Right	Hydraulically (cm)	2" x 8" (5.08x20.32) Cylinder with solenoid valve		N/A
	Manually	Ratchet jack		N/A