

# SSG25 STUMP GRINDER



AVAILABLE FOR: SSV65 / SSV75 / SVL65-2 / SVL75-2 / SVL95-2s



- Maximum cutting arc of 55°
- Hydraulic motor with electric over hydraulics
- Depth of 8" below ground
- 1/2" by 20" diameter wheel with carbide teeth

A great choice for contractors, landscapers, and forestry departments, the SSG25 turns large stumps into small chips.



Discharge deflector pivots up while the cutting wheel is digging into the ground. The high speed cutting wheel cuts fast with less vibration.

Replaceable carbide cutting teeth offer extra long life and are easy to replace.

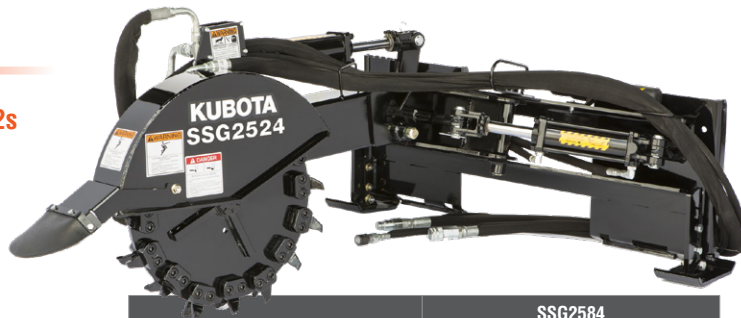

		SSG2584
Mounting Plate		Universal Quick-Attach
Overall Mounting Width (m)		48" (1.22)
Overall Length (m)		60" (1.52)
Weight (kg)		540 lbs (244.9)
Main Frame (mm)		6" x 6" x 1/4" (152x152x6) Tube
Drive and Control System		Hydraulic motor with electric over hydraulic
Hydraulic Requirements (Lpm)		17 to 32 gpm (64.4-121.1)
Articulate Cylinder (cm)		3" x 6" (7.6x15.2) stroke with 1-1/4" (3.2) rod diameter
Tilt Cylinder (cm)		3" x 6" (7.6x15.2) stroke with 1-1/4" (3.2) rod diameter
Number of Cutting Teeth	Straight	8 Replaceable carbide teeth
	Left-Hand	12 Replaceable carbide teeth
	Right-Hand	12 Replaceable carbide teeth
Cutting Wheel Speed		470 rpm @ 17 gpm; 875 rpm @ 32 gpm
Cutting Arc		55°
Max. Cutting Depth Below Ground (cm)		8" (20.3)
Outside Cutting Wheel Diameter (cm)		23-3/4" (60.3)
Cutting Wheel Thickness (mm)		1/2" (13)
Max. Pressure Rating (mPa)		3500 psi (24.1)