
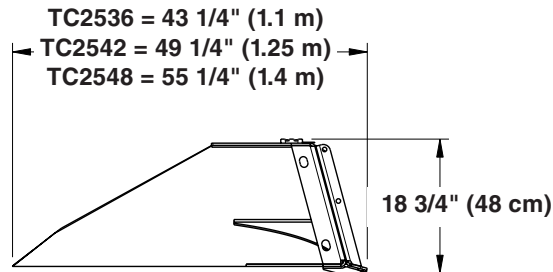


TC25 Series Tree Carrier

		Specifications & Capacities		
		TC2536	TC2542	TC2548
Maximum horsepower	hp (kW)	100 (74.6)		
Hitch Type		Universal Quick Attach Hitch		
Weight	lbs (kg)	286 (130)	315 (143)	345 (157)
Maximum root ball capacity	in (m)	36 (.91)	42 (1.07)	48 (1.22)
Scoop construction	in (mm)	Continuous welded 1/4 (6) AR400 plate steel with beveled front edge and reinforced with 5/16 (8) thick mild steel gusset plates.		
Maximum recommended transplant tree diameter and height	in (cm) ft (m)	3 1/2 (9) diameter 10 (3.05) high	4 1/2 (11) diameter 12 (3.66) high	6 (15) diameter 15 (4.57) high
Reinforcement construction	in (mm)	Continuous welded 5/16 (8) mild steel gussets		
Skid resistance step plates	in (cm)	Two, 3 x 7 1/2 (8 x 19) bolt-on cast steel		
Hook points		2 on each side of hitch plate		

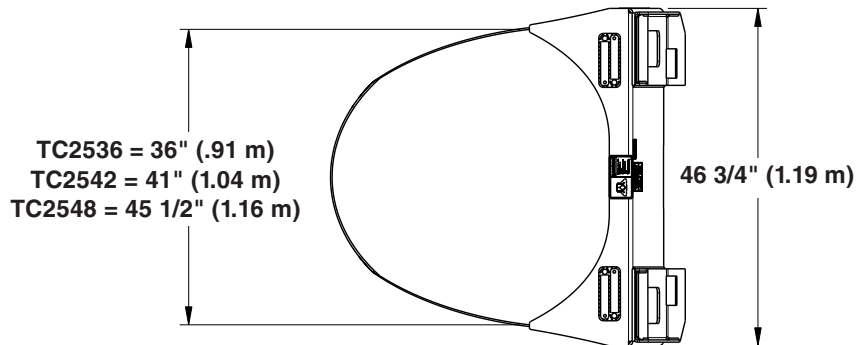

70096